

Specification

Certification: Certified to IEC60079-0, IEC60079-1, IEC60079-31
 Certified to EN60079-0, EN60079-1, EN60079-7, EN60079-31
 ATEX Cert. No. Baseefa02ATEX0224X
 Ex II 2 GD Ex d IIC T4/T5/T6 Gb, Ex tb IIIC T85°C/T100°C/T135°C Db
 or Ex de IIC T5
 IECEx Cert. No. IECEx BAS 10.0078X
 Ex d IIC T4/T5/T6 Gb, Ex tb IIIC T85°C/T100°C/T135°C Db
 UL Listed for USA and Canada
 Hazardous locations:
 Class I, Div 1 Groups C-D
 Class I, Zone 1.
 Listing No. E187894.
 Ordinary locations: Visual-Signal Device.
 Listing No. S8128.
 Refer to UL data sheet at rear of catalogue for complete information.
 GOST 'R' Certification: 1 Exd IIC T4.
 Russian Fire Approval.
 Brazilian (Inmetro) Certification: BR-Ex d IIC T3/T4/T5/T6.
 BR-Ex de IIC T3/T4/T5/T6.

Material: LM25TF Marine Grade Alloy body.
 Grade 316 ANC4B Stainless Steel body.
 Glass reinforced polyester (GRP) terminal chamber.
 Toughened Wellglass.

Finish: Red epoxy paint finish as standard or to customer specification.


Certified Temp: UL -25°C to + 70°C
 ATEX, IECEx, GOST 'R' & Inmetro
 -50°C to +55°C (Ex de)
 -55°C to +70°C (Ex d)

Weight: Exd: 6.6kg. Exde: 7.6kg. Add 8.4kg for stainless steel version.

Entries: Up to 3 x M20 or 2 x M25 ISO in Exd unit.
 Up to 4 x M20 or 4 x M25 ISO in Exe unit.

Terminals: Exe: 6 off suitable for up to 6mm² cable.
 Exd: 8 off suitable for up to 6mm² cable.

Telephone initiation: Initiation by telephone ringing tone or low voltage control signals,
or relay interface: plus initiation of a second beacon or sounder.

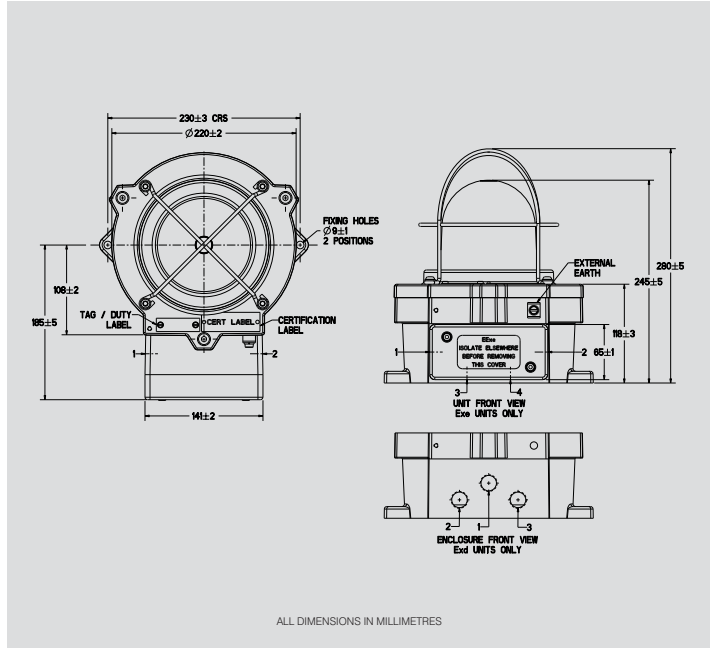

Electrical Ratings:

	d.c.	a.c. 50/60Hz	
Voltage	24	110	240
Tube Energy (Joules)	21	21	21
Peak Current Consumption (mA)	1400	350	185
Effective Intensity (Cd)	355	355	355
Peak Intensity (Cd)	123691	123691	123691

NOTE: The above figures (Cd) are for a clear lens @ 1Hz flash rate.

Multiplying Factor for Colored Lenses.

Red	Blue	Amber	Green	Yellow
0.15	0.12	0.51	0.49	0.86

The photometric data given above has been verified by BSI. Reports are available if required.

Ordering Requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box. **For standard products, available ex-stock, contact sales office for details.**

Model	Certification	Voltage	Terminals	Entries	Flashrate	Options	Guard	Lens Colour	Duty Label	Material	Finish																																																						
XB4																																																																	
	<table border="1"> <thead> <tr> <th>Certification</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>ATEX</td><td>B</td></tr> <tr><td>IECEx</td><td>J</td></tr> <tr><td>UL</td><td>UL*</td></tr> <tr><td>UL (ordinary location)</td><td>UW</td></tr> <tr><td>GOST 'R' Exd</td><td>G†</td></tr> <tr><td>Inmetro</td><td>M</td></tr> </tbody> </table> <p>* UL - available alloy or stainless steel. - 24v d.c., 110v a.c., - 240v a.c. only. † - Russian Fire Approval as standard.</p>	Certification	Code	ATEX	B	IECEx	J	UL	UL*	UL (ordinary location)	UW	GOST 'R' Exd	G†	Inmetro	M	<table border="1"> <thead> <tr> <th>Terminals</th> <th>Type</th> </tr> </thead> <tbody> <tr><td>6 x 6mm² (Exe)</td><td>6E*</td></tr> <tr><td>8 x 6mm² (Exd)</td><td>8D</td></tr> </tbody> </table> <p>* IECEx, UL and GOST not available Exe</p>	Terminals	Type	6 x 6mm ² (Exe)	6E*	8 x 6mm ² (Exd)	8D	<table border="1"> <thead> <tr> <th>Flashrate</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>60 / min</td><td>06</td></tr> <tr><td>120 / min</td><td>12</td></tr> <tr><td>240 / min</td><td>24</td></tr> </tbody> </table>	Flashrate	Code	60 / min	06	120 / min	12	240 / min	24	<table border="1"> <thead> <tr> <th>Guard</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>None</td><td>N</td></tr> <tr><td>Yes</td><td>Y</td></tr> </tbody> </table>	Guard	Code	None	N	Yes	Y	<table border="1"> <thead> <tr> <th>Label</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>None</td><td>N</td></tr> <tr><td>Yes</td><td>Y*</td></tr> </tbody> </table> <p>* Please specify wording.</p>	Label	Code	None	N	Yes	Y*	<table border="1"> <thead> <tr> <th>Finish</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>Red</td><td>R</td></tr> <tr><td>Blue</td><td>B</td></tr> <tr><td>Yellow</td><td>Y</td></tr> <tr><td>Grey</td><td>G</td></tr> <tr><td>White</td><td>W</td></tr> <tr><td>Other</td><td>S*</td></tr> </tbody> </table> <p>* Please specify.</p>	Finish	Code	Red	R	Blue	B	Yellow	Y	Grey	G	White	W	Other	S*					
Certification	Code																																																																
ATEX	B																																																																
IECEx	J																																																																
UL	UL*																																																																
UL (ordinary location)	UW																																																																
GOST 'R' Exd	G†																																																																
Inmetro	M																																																																
Terminals	Type																																																																
6 x 6mm ² (Exe)	6E*																																																																
8 x 6mm ² (Exd)	8D																																																																
Flashrate	Code																																																																
60 / min	06																																																																
120 / min	12																																																																
240 / min	24																																																																
Guard	Code																																																																
None	N																																																																
Yes	Y																																																																
Label	Code																																																																
None	N																																																																
Yes	Y*																																																																
Finish	Code																																																																
Red	R																																																																
Blue	B																																																																
Yellow	Y																																																																
Grey	G																																																																
White	W																																																																
Other	S*																																																																
	<table border="1"> <thead> <tr> <th>Voltage</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>24V d.c.</td><td>B</td></tr> <tr><td>48V d.c.</td><td>C</td></tr> <tr><td>110V d.c.</td><td>D</td></tr> <tr><td>110V a.c.</td><td>E</td></tr> <tr><td>120V a.c.</td><td>F</td></tr> <tr><td>220V a.c.</td><td>G</td></tr> <tr><td>240V a.c.</td><td>H</td></tr> <tr><td>254V a.c.</td><td>J</td></tr> </tbody> </table>	Voltage	Code	24V d.c.	B	48V d.c.	C	110V d.c.	D	110V a.c.	E	120V a.c.	F	220V a.c.	G	240V a.c.	H	254V a.c.	J	<table border="1"> <thead> <tr> <th>Entries</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>M20</td><td>*B</td></tr> <tr><td>M25</td><td>*C</td></tr> <tr><td>1/2" NPT</td><td>*D</td></tr> <tr><td>3/4" NPT</td><td>*E</td></tr> </tbody> </table> <p>* Prefix entry size (see diagram above) with entry position code e.g. 1B2B.</p>	Entries	Code	M20	*B	M25	*C	1/2" NPT	*D	3/4" NPT	*E	<table border="1"> <thead> <tr> <th>Options</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>None</td><td>A</td></tr> <tr><td>Telephone</td><td>B</td></tr> <tr><td>Telephone & 2nd Beacon/ Sounder</td><td>C</td></tr> <tr><td>Relay (12V-48VAC/DC)</td><td>D*</td></tr> <tr><td>Relay (12V-48VAC/DC) & 2nd Beacon/ Sounder</td><td>E*</td></tr> </tbody> </table> <p>* Specify a.c./d.c. voltage</p>	Options	Code	None	A	Telephone	B	Telephone & 2nd Beacon/ Sounder	C	Relay (12V-48VAC/DC)	D*	Relay (12V-48VAC/DC) & 2nd Beacon/ Sounder	E*	<table border="1"> <thead> <tr> <th>Lens Colour</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>Red</td><td>R</td></tr> <tr><td>Blue</td><td>B</td></tr> <tr><td>Green</td><td>G</td></tr> <tr><td>Yellow</td><td>Y</td></tr> <tr><td>Amber</td><td>A</td></tr> <tr><td>Clear</td><td>C</td></tr> </tbody> </table>	Lens Colour	Code	Red	R	Blue	B	Green	G	Yellow	Y	Amber	A	Clear	C	<table border="1"> <thead> <tr> <th>Material</th> <th>Code</th> </tr> </thead> <tbody> <tr><td>Alloy</td><td>1</td></tr> <tr><td>Stainless Steel</td><td>0</td></tr> </tbody> </table>	Material	Code	Alloy	1	Stainless Steel	0
Voltage	Code																																																																
24V d.c.	B																																																																
48V d.c.	C																																																																
110V d.c.	D																																																																
110V a.c.	E																																																																
120V a.c.	F																																																																
220V a.c.	G																																																																
240V a.c.	H																																																																
254V a.c.	J																																																																
Entries	Code																																																																
M20	*B																																																																
M25	*C																																																																
1/2" NPT	*D																																																																
3/4" NPT	*E																																																																
Options	Code																																																																
None	A																																																																
Telephone	B																																																																
Telephone & 2nd Beacon/ Sounder	C																																																																
Relay (12V-48VAC/DC)	D*																																																																
Relay (12V-48VAC/DC) & 2nd Beacon/ Sounder	E*																																																																
Lens Colour	Code																																																																
Red	R																																																																
Blue	B																																																																
Green	G																																																																
Yellow	Y																																																																
Amber	A																																																																
Clear	C																																																																
Material	Code																																																																
Alloy	1																																																																
Stainless Steel	0																																																																

All the above specifications, dimensions, weights and tolerances are nominal (typical) and Cooper MEDC reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.

